


30AM Push Around Vertical Lift

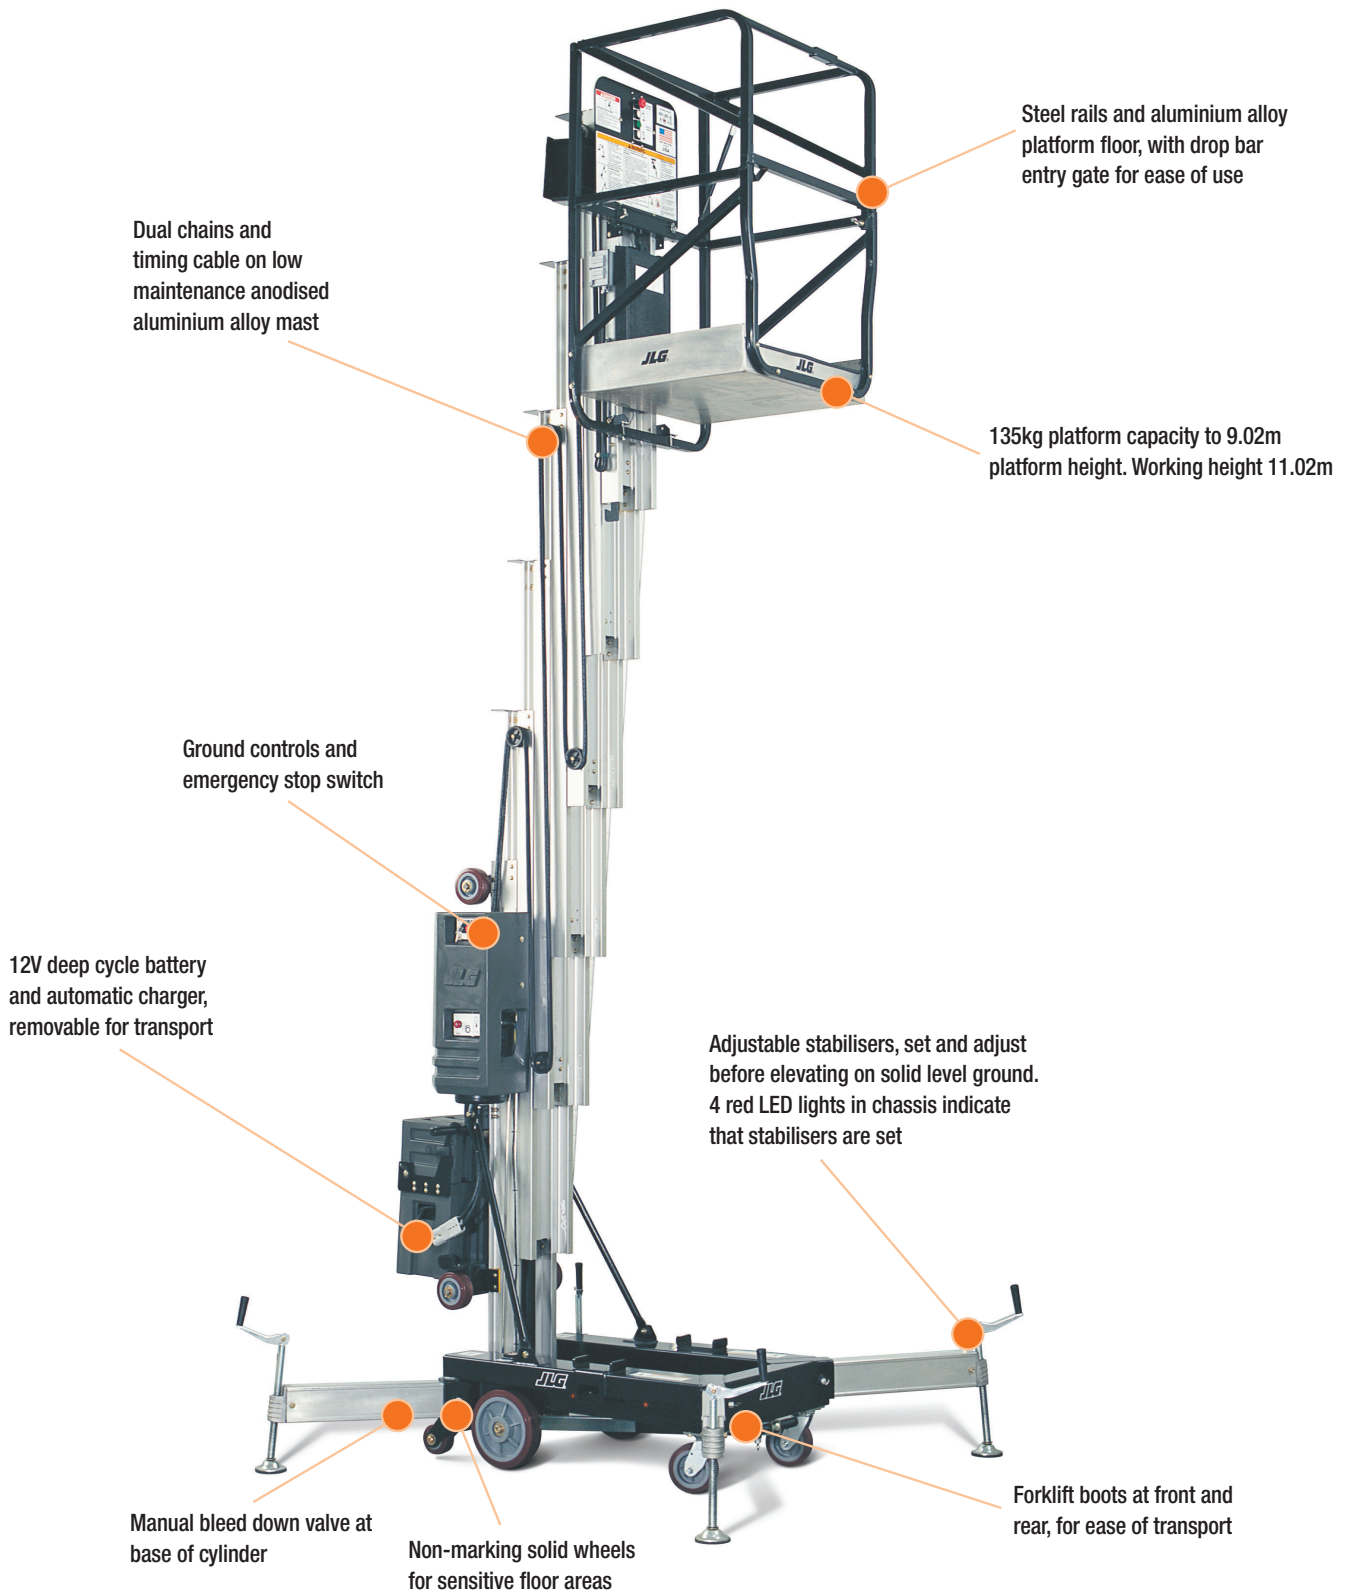

Dual chains and timing cable on low maintenance anodised aluminium alloy mast

Steel rails and aluminium alloy platform floor, with drop bar entry gate for ease of use

135kg platform capacity to 9.02m platform height. Working height 11.02m

Ground controls and emergency stop switch

12V deep cycle battery and automatic charger, removable for transport

Adjustable stabilisers, set and adjust before elevating on solid level ground. 4 red LED lights in chassis indicate that stabilisers are set

Manual bleed down valve at base of cylinder

Non-marking solid wheels for sensitive floor areas

Forklift boots at front and rear, for ease of transport

QUESTIONS TO ASK

- What are the ground conditions in the work area?
- What are the floor load requirements and access to the site?
- What is the working height needed for the job?
- Is there 240V AC power available for charging?
- Is indoor and flat hard support surface needed?

KEY SELLING POINTS

- Work in tight and confined vertical areas
- 4 easy fit outriggers with interlock switch and telltale light indicating each outrigger is locked and set
- Base can be levelled on outriggers
- Dual chain vertical mast lift
- Non-marking solid tyres
- 1 x 12V DC deep cycle battery
- Removable SCR automatic battery charger for quick recharging

APPLICATIONS

- Facilities maintenance
- Electricians for lighting tube/globe replacements
- All maintenance work
- Factory fit outs in tight areas
- Ideal warehouse use between racking and narrow aisle areas
- Hospitals, schools and offices for suspended ceiling maintenance

SPECIFICATIONS

Performance:

| | |
|----------------------------|--------|
| Platform Height (max.) | 9.02m |
| Working Height | 11.02m |
| Lift Time | 75 sec |
| Lower Time | 39 sec |
| Platform Capacity Standard | 135kg |

Dimensions:

| | |
|-----------------------------|-------|
| Stowed Length | 1.32m |
| Stowed Height | 1.97m |
| Stabiliser Footprint Length | 1.89m |
| Stabiliser Footprint Width | 1.81m |

Platforms:

| | |
|--------------------------------|------------------------|
| Standard Platform Type | Steel Rail/Alloy Floor |
| Overall Width | 0.74m |
| Standard Platform Size - (WxL) | 0.66 x 0.66m |
| Chassis Length | 1.19m |
| Platform Entry Height | 0.48m |

Power:

| | |
|--------------|-----------|
| Power Source | Battery |
| DC Voltage | 12V |
| DC Power | 93 Amp hr |

Weights and Capabilities:

| | |
|--------|-------|
| GVW AC | 404kg |
| GVW DC | 427kg |