

AT30G

Insulated Aerial Device

Working Height of 11 m
Side Reach of 7 m
Platform Capacity of 181 kg
Telescopic Aerial Device



1300 1ALTEC
www.altecaus.com.au

Altec

STANDARD FEATURES

- Altec ISO-Grip® System – Single Hand Control
- Lifetime structural warranty
- Insulation per AS1418.10 - 2011, 66kv/33kv
- Continuous Rotation
- 180 Degree Platform Rotator
- 1 1/2 Man Platform
- Platform Capacity – 181 kg
- Platform Access from the Ground
- Telescopic Aerial Device
- Tool Circuit at Platform
- Straight Down Outriggers
- Secondary Stowage System
- Powder-coated steel structures
- Designed in ISO 9001 Certified Facilities

OPTIONS

- Custom Layout, Lockers and Accessories as required
- Chassis Spring Interlocks for use without Outriggers
- Comprehensive Range of Tools and Equipment from Altec Supply®


RECOMMENDED FEATURES

- Platform Hard Cover

GENERAL SPECIFICATIONS

Ground to Bottom of Platform	9.3 m
Working Height	11.3 m
Maximum Reach	7 m
Boom Articulation	-13.5° to +80°

REACH DIAGRAM

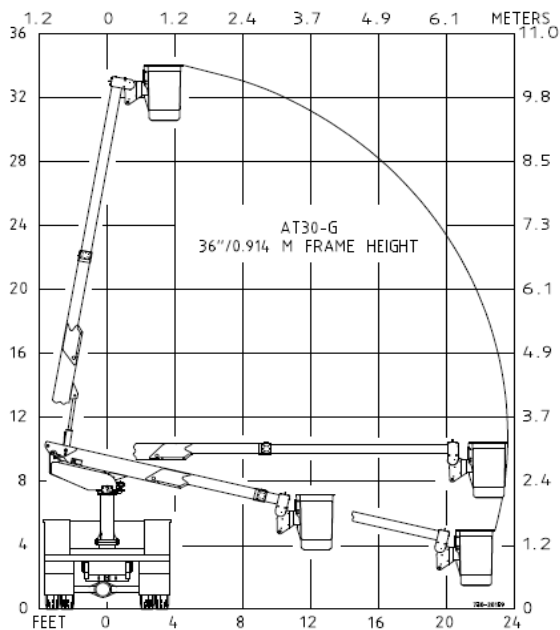

180 degree platform rotator



Iso-Grip Control



For more complete information on Altec products and services, visit us on www.altecaus.com.au. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.

© 2015 Altec Inc. All Rights Reserved. AAH.BR.AL16.1

