

ELECTRIC SCISSOR LIFTS

WARRANTY



OPTIMUM 8



BEST DRIVING AND LIFTING EXPERIENCE

- AC powered
- High precision driving
- Proportional and quick movements
- Best turning radius

UTMOST VERSATILITY

- Ability to go through standard doorways
- Mobile potholes protection
- Indoor - outdoor rated

MINIMAL MAINTENANCE AND DOWNTIME

- Maintenance free AC motors
- 2 easy access swing-out trays
- Haulotte Activ'Screen (onboard diagnostic)
- Smart transportability

LONGER LIFE TIME


- Haulotte Activ'Energy Management takes care of your batteries
- Extreme robustness
- Optimized total cost of ownership

ELECTRIC SCISSOR LIFTS

TECHNICAL DATA

OPTIMUM 8

Working height	7.77 m
Platform height	5.77 m
Max. drive working height	5.77 m
Lift capacity - inside	230 kg (2 pers.)
Lift capacity - outside	230 kg (1 pers.)
Lift capacity on the extension deck	120 kg
A Platform length - outside	1.72 m
B Platform length - extended	2.59 m
Platform size - extended	2.59 x 0.74 m
Length - extension	0.86 m
C Platform width - outside	0.74 m
D Height - stowed	1.98 m
F Overall width	0.79 m
G Length	1.9 m
H Wheelbase	1.38 m
I Ground clearance - center	8.7 cm
Ground clearance - deployed potholes	2 cm
Drive speed	0.5 - 4.5 km/h
Gradeability	25 %
Tilt	1.5° / 3°
Turning radius - outside	1.5 m
Non-marking tyres	12.5 x 4.13
Batteries	24 V - 225 Ah
Hydraulic system capacity	6 l
Weight	1 590 kg

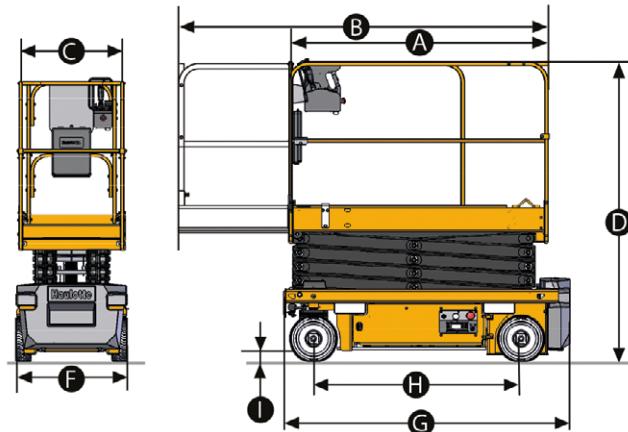

STANDARD EQUIPMENT

- > Haulotte Activ'Screen (battery charge, hourmeter, service alert & failures icons in code or in full text...)
- > Haulotte Activ'Energy Management: Smart CAN charger
- > Front platform extension
- > Mobile upper control box
- > Lateral fork lifting pockets
- > Pothole guards
- > 2 front steering and 2 rear driving wheels
- > Non marking tyres
- > 24 V electric drive brushless AC motors
- > 2 swing out trays
- > Battery level indicator on upper and lower control boxes
- > Electric or manual break release system

OPTIONS AND ACCESSORIES

- > Haulotte Activ'Energy Management: automatic or manual batteries waterfilling system
- > Secondary guarding system
- > Pipe cradle
- > Panel carrier
- > Working light
- > Folding guardrails
- > Flashing light (standard in AUS / NZ)
- > Dual flashing lights
- > AC power to platform
- > Hydraulic oil for cold countries
- > Lithium-Ion maintenance-free batteries
- > AGM maintenance-free batteries
- > Telematics ready

